

# Q.PEAK DUO M-G11 SERIES



390-410Wp | 108Cells  
21.4% Maximum Module Efficiency

MODEL Q.PEAK DUO M-G11



Breaking the 21 % efficiency barrier  
Q.ANTUM DUO Z technology with zero gap cell layout  
boosts module efficiency up to 21.4 %.



Enduring high performance  
Long-term yield security with Anti LeTID Technology,  
Anti PID Technology<sup>1</sup> and Hot-Spot Protect.



Extreme weather rating  
High-tech aluminium alloy frame, certified for  
high snow (5400Pa) and wind loads (3600Pa).



Innovative all-weather technology  
Optimal yields, whatever the weather with excellent low-light  
and temperature behaviour.



A reliable investment  
Inclusive 12-year product warranty and 25-year linear  
performance warranty<sup>2</sup>.



The most thorough testing  
programme in the industry  
Qcells is the first solar module manufacturer to pass the  
most comprehensive quality programme in the industry: The  
new "Quality Controlled PV" of the independent certification  
institute TÜV Rheinland.

<sup>1</sup> APT test conditions according to IEC / TS 62804-1:2015, method A (-1500 V, 96 h)  
<sup>2</sup> See data sheet on rear for further information.

The ideal solution for:



Rooftop arrays on  
residential buildings




Rooftop arrays on  
commercial / industrial  
buildings



# Q.PEAK DUO M-G11 SERIES

## Mechanical Specification

Format	1692 mm × 1134 mm × 30 mm (including frame)
Weight	21.2 kg
Front Cover	3.2 mm thermally pre-stressed glass with anti-reflection technology
Back Cover	Composite film
Frame	Black anodised aluminium
Cell	6 × 18 monocrystalline Q.ANTUM solar half cells
Junction box	53-101 mm × 32-60 mm × 15-18 mm Protection class IP67, with bypass diodes
Cable	4 mm <sup>2</sup> Solar cable; (+) ≥ 1250 mm, (-) ≥ 1250 mm
Connector	Stäubli MC4, Hanwha Q CELLS HQC4; IP68

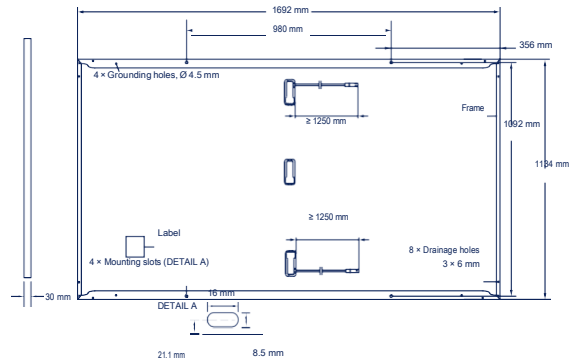


## Electrical Characteristics

POWERCLASS			390	395	400	405	410
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC <sup>1</sup> (POWER TOLERANCE +5W/-0W)							
Minimum	Power at MPP <sup>1</sup>	$P_{MPP}$ [W]	390	395	400	405	410
	Short Circuit Current <sup>1</sup>	$I_{SC}$ [A]	13.46	13.50	13.54	13.57	13.61
	Open Circuit Voltage <sup>1</sup>	$V_{OC}$ [V]	37.10	37.13	37.16	37.18	37.21
	Current at MPP	$I_{MPP}$ [A]	12.76	12.83	12.90	12.97	13.04
	Voltage at MPP	$V_{MPP}$ [V]	30.56	30.78	31.00	31.22	31.43
	Efficiency <sup>1</sup>	$\eta$ [%]	≥ 20.3	≥ 20.6	≥ 20.8	≥ 21.1	≥ 21.4
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT <sup>2</sup>							
Minimum	Power at MPP	$P_{MPP}$ [W]	292.6	296.3	300.1	303.8	307.6
	Short Circuit Current	$I_{SC}$ [A]	10.85	10.88	10.91	10.94	10.97
	Open Circuit Voltage	$V_{OC}$ [V]	34.99	35.01	35.04	35.07	35.09
	Current at MPP	$I_{MPP}$ [A]	10.03	10.10	10.16	10.22	10.28
	Voltage at MPP	$V_{MPP}$ [V]	29.16	29.35	29.54	29.72	29.91

<sup>1</sup>Measurement tolerances  $P_{MPP} \pm 3\%$ ;  $I_{SC}$ ;  $V_{OC} \pm 5\%$  at STC: 1000 W/m<sup>2</sup>, 25 ± 2 °C, AM 1.5 according to IEC 60904-3 • \*800 W/m<sup>2</sup>, NMOT, spectrum AM 1.5


## Qcells PERFORMANCE WARRANTY PERFORMANCE AT LOW IRRADIANCE

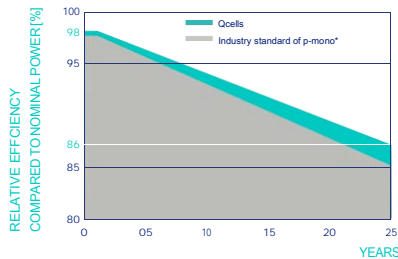

At least 98 % of nominal power during first year. Thereafter max. 0.5 % degradation per year. At least 93.5 % of nominal power up to 10 years. At least 86% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Qcells sales organisation of your respective country.

\*Standard terms of guarantee for the 5 PV companies with the highest production capacity in 2021 (February 2021)

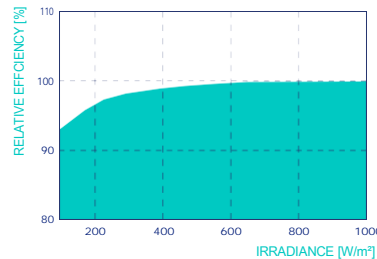

Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m<sup>2</sup>).

TEMPERATURE COEFFICIENTS					
Temperature Coefficient of $I_{SC}$	$\alpha$ [% / K]	+0.04	Temperature Coefficient of $V_{OC}$	$\beta$ [% / K]	-0.27
Temperature Coefficient of $P_{MPP}$	$\gamma$ [% / K]	-0.34	Nominal Module Operating Temperature	NMOT [°C]	43 ± 3

## Properties for System Design

Maximum System Voltage	$V_{SYS}$ [V]	1000	PV module classification	Class II
Maximum Reverse Current	$I_R$ [A]	25	Fire Rating based on ANSI/UL 61730	C / TYPE 2
Max. Design Load, Push/Pull	[Pa]	3600/2400	Permitted Module Temperature	-40 °C - +85 °C
Max. Test Load, Push/Pull	[Pa]	5400/3600	on Continuous Duty	

## Qualifications and Certificates

Quality Controlled PV - TÜV Rheinland; IEC 61215:2016; IEC 61730:2016. This data sheet complies with DIN EN 50380.



Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.

Hanwha Q CELLS GmbH Sonnenallee 17-21, 06766 Bitterfeld-Wolfen, Germany | TEL +49 (0)3494 66 99-23444 | FAX +49 (0)3494 66 99-23000 | EMAIL sales@q-cells.com | WEB www.qcells.com

qcells